




PRESSURE GAUGES



	BR411	BR301 / BR302	BR251	BR201 / BR202
Dial	4.5"	1.5", 2", 2.5", 4", 4.5", 6"	1.5", 2", 2.5", 4", 4.5", 6"	1.5", 2", 2.5", 4", 4.5", 6"
Connection	1/4", 1/2" NPT	1/8", 1/4", 1/2" NPT	1/8", 1/4", 1/2" NPT	1/8", 1/4", 1/2" NPT
Internals	BRASS, 316 SS	316 SS	316 SS	BRASS
Ranges	30" VAC to 20,000 PSI	30" VAC to 20,000 PSI	30" VAC to 20,000 PSI	30" VAC to 10,000 PSI



TEMPERATURE

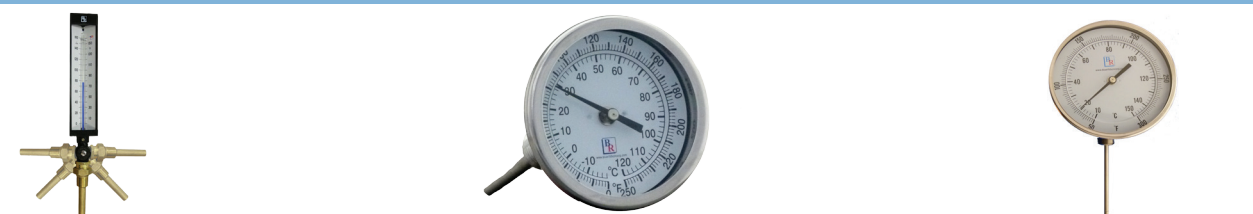

	BR9	BI-METAL THERMOMETERS BR3/BR3A / BR5/BR5A	BR3AT/BR5AT
	9" Aluminum Case Adjustable Angle	3", 5"	3", 5"
	1.25 NEF	1/2" NPT	1/2" NPT
	Green Organic Spirit Fill	304 Case, 316 SS Internal	304 Case, 316 SS Internal
	-40 - 300 °F/C	-40 - 1000 °F/C	-40 - 1000 °F/C



DIAPHRAGM SEALS



	BR-D Series 1000	M45 Series 4000	Model M35 Series 4000	Model LP Series 5000
	Bolted Design	One Piece Design	One Piece Design	One Piece Design
Connection	1/4"-1" Process 1/4", 1/2" Instrument	1/4", 1/2" Process 1/4", 1/2" Instrument	1/4", 1/2" Process 1/4", 1/2" Instrument	1/4" Process 1/4" Instrument
Diaphragm Material	Standard SS Others Available	Stainless Steel	Stainless Steel	Stainless Steel
Ranges	30" VAC - 2500 PSI	1000 - 2500 PSI	0 - 1000 PSI	0 - 600



	BR601	BR651	BR101 / BR102	BR501
Dial	4.5"	4.5"	1.5", 2", 2.5", 4"	2.5", 4", 5"
Connection	1/4" NPT	1/4" NPT	1/8", 1/4", 1/2" NPT	1/4" & 1/2" NPT
Internals	BRASS	BRASS	BRASS	BRASS
Ranges	VAC to 1,000 PSI	VAC to 1,000 PSI	30" VAC to 5,000 PSI	Vacuum to 5 PSI



	THERMOWELLS -	THERMOWELLS - BI-METAL	TRIDICATORS	BRGT
	Brass, 304 SS	Brass, 304 SS, 316 SS Other Upon Request	2.5", 3"	2"
	3/4" NPT	1/4", 1/2"	1/4", 1/2" NPT	3/4" FPT
	Lagging Available	Lagging Available	BRASS	BRASS
	Stem Lengths 3.5" / 6"	2.5" - 72"	To 200 PSI - To 300 °F/C	0-15 to 100 PSI (with 1/10# increments - only for 0-15)



	Flanged Seal Series 7000	ISO-Ring	BRGD SAI-2	BRPV Seal Series 3000
	1", 1 1/2", 2" Standard 150# RF, 300# RF	Stainless Steel Other Available	2 1/2" Gauge w/PVC Seal	PVC Construction
Connection	Welded Flanged Diaphragm Seal	Wafer Style	1/4", 1/2" FNPT	1/4"
Diaphragm Material	Stainless Steel Viton, Buna	Buna, Viton	PTFE / Viton	Teflon
Ranges	30" VAC - 2500 PSI	VAC - 1000 PSI	15 - 400 PSI	30" VAC - 200 PSI



	DIFFERENTIAL	BR801 / BR802	BR901 / BR902	SANITARY	MUD GAUGE
Dial	2.5" & 4"	2.5", 4"	2.5", 4"	2.5", 4"	4"
Connection	1/4" & 1/2" NPT	1/4" & 1/2" NPT	1/4" & 1/2" NPT	1.5" & 2" Tri-Clamp	2" NPT
Internals	316 SS	316 SS	BRASS	316 SS	316 SS
Ranges	VAC - 150 PSI	30"-0-150 PSI/F 30"-0-300 PSI/F	30" VAC to 15,000 PSI	30" VAC to 600 PSI	5K PSI to 15K PSI



	5" HOT WATER	2.5" HOT WATER	CLAMP-On THERMOMETER
	Straight BR5HW-S Angle BR5HW-A	BRHW BRHW-SW	2.5" Aluminum Dial
	1/2" NPT	1/2" NPT • 3/4" Solder	Spring Tension
	Valox Case / Seperable Brass Well Included	Aluminum Case / Brass Stem w/Well	BRASS
	-40 - 110 °F/C 30-240 °F/C	30-2500 °F/C	30-250 °F/C



ACCESSORIES



BD300 - Pump Controller
Features
<ul style="list-style-type: none"> • Multi-Pump Alternation Control • 0-20 mA, 4-20 mA, 0-5 V, 1-5 V, and ± 10V Inputs • NEMA 4X, IP65 Front • Programmable Display & Function Keys • Standard 1/8 DIN (445 mm x 92 mm) • Modbus® RTU Communication Protocol Standard
Options
<ul style="list-style-type: none"> • 4 Relays + Isolated 4-20mA Output • External 4-Relay & Digital I/O Expansion Modules • USB, RS-232, RS-485 Serial Communication

